

Micro Motion® Compact Density Meters

Peak performance precision density meter

Unparalleled real-world performance

- Superior application performance via traceable calibrations, performed at combined pressure and temperature conditions
- OIML R117-1 approved for MID conformance
- ISO/IEC accredited calibration

Superior multi-variable I/O, meter health, and application capabilities

- Flow rate indication (velocity/volume flow) ensures sample integrity
- Internal diagnostics for fast verification of meter health and installation
- Application-specific factory configurations ensure fit-for-purpose operation

Installation flexibility and compatibility

- Fluid, process and environmental effects are minimized to ensure superb measurement confidence
- Supports multiple protocols for connection to DCS, PLC, and flow computers
- Retrofit option available for Micro Motion 7835 and 7845 liquid density meters
- Optional stainless steel transmitter housing for corrosion resistance in harsh environments



Compact Density Meter

Fork Density Meter

Gas Density Meter

Specific Gravity Meter

Fork Viscosity Meter

Heavy Fuel Viscosity Meter


Peak performance
precision density meterDirect insertion
density meterFiscal gas
density meterGas specific gravity
meterHigh performance industrial
viscosity meterHigh performance marine
and power HFO
viscosity meter

Micro Motion® Compact Density Meters

Micro Motion® compact density meters use the Micro Motion dual curved-tube meter technology to measure density. These meters use a multi-variable measurement system, designed for fiscal metering of high-value products such as crude oil, refined hydrocarbons, alcohol, and many aggressive process liquids.

Application configurations

Allows you to preselect an application-specific configuration for your meter from a wide range of options.

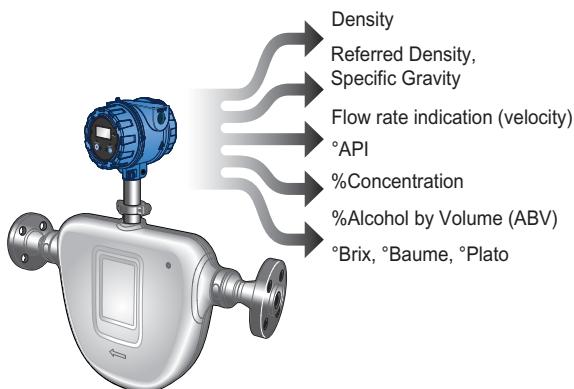

Integral transmitter

Supports Time Period Signal (TPS), 2-wire TPS, Analog (4–20 mA), HART, WirelessHART®, and Modbus RS-485 communications.




Meter diagnostics

Ensure measurement health through known density verification (KDV) and other meter and installation diagnostic capabilities.




Retrofit capabilities

Retrofit option has the same face-to-face dimensions as the Micro Motion 7835 and 7845 density meters.

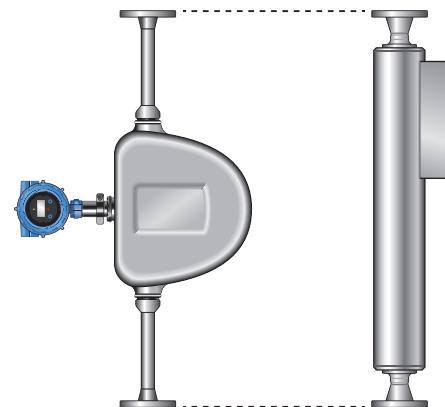

Thermal insulation

A soft, weather-proof insulating jacket that is easily fitted to all CDM versions.

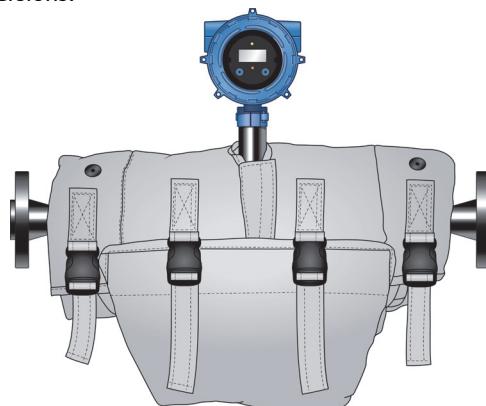


Accreditation and standards

Accredited calibrations and compliance with domestic and international standards.

	ATEX, CSA, IECEx
	OIML R117-1 (MID)
	HART, WirelessHART, Modbus, FOUNDATION fieldbus
	NACE
	NORSOK
	ISO/IEC 17025 accreditation


Operating principle

Compact density meters use the Micro Motion dual curved-tube meter technology to measure density and flow rate (velocity/volume flow).

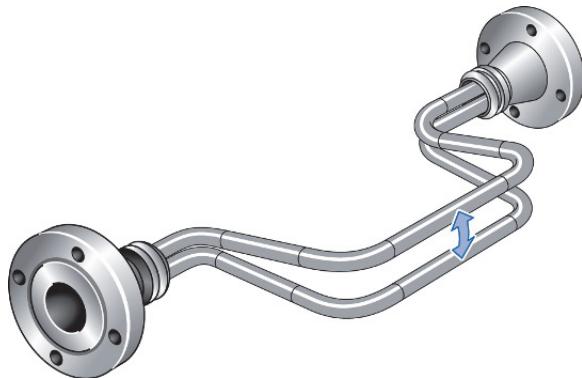


Tube vibration

- Dual, parallel tubes vibrate at their natural frequency.
- The natural frequency changes with the density of the liquid inside the tubes.

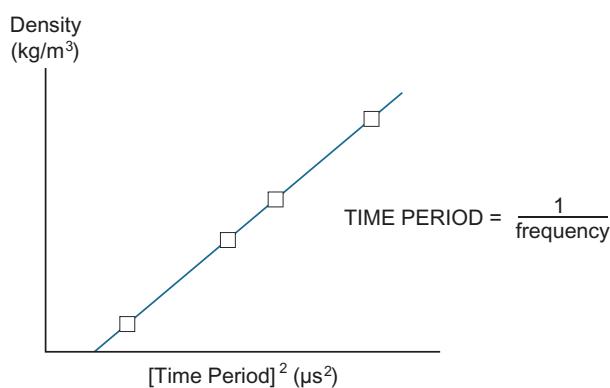

Density calibration

- Micro Motion transmitters accurately measure time period.
- Measured time periods are converted into density readings using meter calibration coefficients.
- Multiple calibration points ensure optimum meter performance.

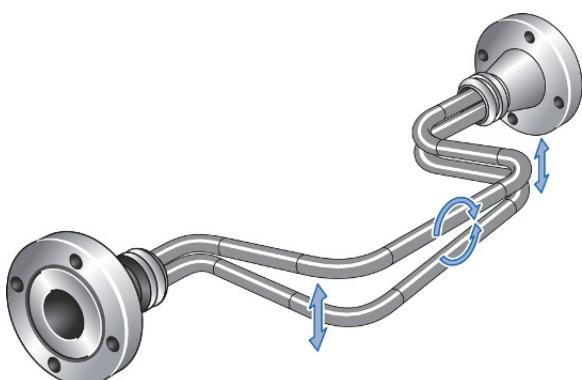

Flow rate indication (velocity/volume flow)

- Measuring the twist in the vibrating tubes gives an indication of the liquid flow rate (velocity/volume flow).

Performance specifications

Density measurement

Specification	CDM100P (Peak performance precision density meter)	CDM100M (General purpose precision density meter)
Accuracy (liquid)	$\pm 0.1 \text{ kg/m}^3$ ($\pm 0.0001 \text{ g/cm}^3$)	$\pm 0.2 \text{ kg/m}^3$ ($\pm 0.0002 \text{ g/cm}^3$)
Repeatability	$\pm 0.02 \text{ kg/m}^3$ ($\pm 0.00002 \text{ g/cm}^3$)	$\pm 0.02 \text{ kg/m}^3$ ($\pm 0.00002 \text{ g/cm}^3$)
Operating density range	0–3000 kg/m ³ (0–3 g/cm ³)	<ul style="list-style-type: none"> ■ TPS transmitter version: 0–1000 kg/m³ (0–1 g/cm³) ■ Analog/Discrete transmitter versions: 0–3000 kg/m³ (0–3 g/cm³)
Calibration range	300–1300 kg/m ³ (0.3–1.3 g/cm ³)	300–1300 kg/m ³ (0.3–1.3 g/cm ³)
Process temperature effect (corrected) ⁽¹⁾	<ul style="list-style-type: none"> ■ $\pm 0.005 \text{ kg/m}^3$ per °C ■ $\pm 0.278 \text{ kg/m}^3$ per 100 °F 	<ul style="list-style-type: none"> ■ $\pm 0.015 \text{ kg/m}^3$ per °C ■ $\pm 0.834 \text{ kg/m}^3$ per 100 °F
Sensor maximum working pressure	248 bar (3600 psi) or flange limit	100 bar (1450 psi) or flange limit
Process pressure effect (corrected) ⁽²⁾	<ul style="list-style-type: none"> ■ $\pm 0.003 \text{ kg/m}^3$ per bar ■ $\pm 0.021 \text{ kg/m}^3$ per 100 psi 	<ul style="list-style-type: none"> ■ $\pm 0.006 \text{ kg/m}^3$ per bar ■ $\pm 0.042 \text{ kg/m}^3$ per 100 psi

(1) Process temperature effect is the maximum measurement offset due to process fluid temperature changing away from the reference calibration temperature of 20°C..

(2) Process pressure effect is the maximum measurement offset due to process fluid pressure changing away from the reference calibration pressure of 1 bar.

Temperature measurement

Specification	Value
Operating temperature range	-58 °F to +400 °F (-50 °C to +204 °C)
Integral temperature sensor	<ul style="list-style-type: none"> ■ Traceable calibration ■ Technology: 100 Ω RTD ■ Accuracy: BS1904 Class, DIN 43760 Class A ($\pm 0.15 + 0.002 \times \text{Temp } ^\circ\text{C}$)
Case temperature sensors ⁽¹⁾	<ul style="list-style-type: none"> ■ Technology: 3 x 100 Ω RTD ■ Accuracy: BS1904 Class, DIN 43760 Class B ($\pm 0.30 + 0.005 \times \text{Temp } ^\circ\text{C}$)

(1) Case temperature sensors are used for environmental temperature effect correction in applications where the case temperature measurement does not need to be traceable and/or accredited. Where accreditation and measurement traceability are required, these sensors are used for diagnostics purposes only and do not perform any correction on the density measurement.

Case pressure

Specification	Value
Maximum case working pressure	27 bar (389 psig)
Typical burst pressure (case)	195 bar (2824 psig)

Diagnostic flow rate indication (velocity/volume flow)

Expected accuracy is within ±5% of reading.

Typical flow recommendations	Flow rate	Velocity
Minimum	3 gpm (700 L/hr)	1.5 ft/sec (0.5 m/sec)
Normal	11 gpm (2,500 L/hr)	5 ft/sec (1.5 m/sec)
Maximum	75 gpm (17,000 L/hr)	30 ft/sec (9 m/sec)

Note:

For fluids that contain abrasive particles, velocity should be below 10 ft/s (3 m/s).

Transmitter specifications

Available transmitter versions

Typical application	Transmitter version ⁽¹⁾	Output channels			
		A	B	C	
■ General purpose measurement ■ DCS/PLC connection	Analog	4–20 mA + HART (passive)	4–20 mA (passive)	Modbus/RS-485	
	Processor for remote-mount 2700 FOUNDATION™ fieldbus transmitter	Disabled	Disabled	Modbus/RS-485	
■ General purpose measurement with output switch ■ DCS/PLC connection	Discrete	4–20 mA + HART (passive)	Discrete output	Modbus/RS-485	
	Time Period Signal (TPS) 2-wire Time Period Signal (TPS)	4–20 mA + HART (passive)	Time Period Signal (TPS)	Modbus/RS-485	
■ Fiscal/Custody Transfer ■ Flow Computer connection		Power and TPS ⁽²⁾	4-wire 100Ω, RTD		

(1) For more information on the transmitter outputs and ordering codes, see the product ordering information.

(2) For the 2-wire transmitter version, TPS is superimposed on power lines.

Local display

Design	Features
Physical	<ul style="list-style-type: none"> ■ Segmented two-line LCD screen ■ Can be rotated on transmitter, in 90-degree increments, for ease of viewing ■ Suitable for hazardous area operation ■ Optical switch controls for hazardous area configuration and display ■ Glass lens ■ Three-color LED indicates meter and alert status
Functions	<ul style="list-style-type: none"> ■ View process variables ■ View and acknowledge alerts ■ Configure mA and RS-485 outputs ■ Supports Known Density Verification (KDV) ■ Supports multiple languages

Process measurement variables

Variables	Value
Standard	<ul style="list-style-type: none"> ■ Density ■ Time period ■ Temperature ■ Drive gain ■ External temperature input ■ External pressure input ■ Flow rate (velocity/volume flow)
Derived	<p>The derived output variables vary, depending on the application configuration of the meter.</p> <ul style="list-style-type: none"> ■ Referred density (API Tables 53A, 53B) ■ Referred density (Concentration) ■ Specific gravity (Concentration) ■ %Alcohol by Volume (ABV) ■ Alcohol proof ■ °API ■ °Balling ■ °Baume ■ °Brix ■ °Plato ■ %Mass ■ %Solids ■ °Twaddle ■ User-defined calculation output

Note:

- For the TPS transmitter version, process measurement variables are limited to Time Period, Temperature, and Flow.
- For the 2-wire transmitter version, process measurement variables are limited to Time Period and Temperature.

Additional communication options

The following communications accessories are purchased separately from the meter.

Type	Description
FOUNDATION™ fieldbus	Micro Motion® remote-mount Model 2700 transmitter with FOUNDATION fieldbus <ul style="list-style-type: none"> ■ One FOUNDATION fieldbus H1 connection provided
WirelessHART®	Wireless HART is available via the THUM adapter
HART® Tri-Loop	Three additional 4–20 mA outputs are available via connection to a HART Tri-Loop

Hazardous area approvals

Ambient and process temperature limits are defined by temperature graphs for each meter and electronics interface option. Refer to the detailed approval specifications, including temperature graphs for all meter configurations, and safety instructions that can be found on the product page at the Micro Motion web site (at www.micromotion.com).

ATEX	
Zone 1 Intrinsically safe	With display (Analog, TPS, Discrete versions only)  ■ II 2G Ex ib IIC T4...T1 Gb (-40 °C to +65 °C) ■ II 2D Ex ib IIIC T ⁽¹⁾ °C Db ■ IP 66/67 Without display (All transmitter versions)  ■ II 2G Ex ib IIC T6...T1 Gb (-40 °C to +65 °C ⁽²⁾) ■ II 2D Ex ib IIIC T ⁽¹⁾ °C Db ■ IP 66/67
Zone 1 Flameproof	With display (Analog, TPS, Discrete versions with stainless steel transmitter housing material only)  ■ II 2G Ex db [ib] IIC T6...T1 Gb (-40 °C to +65 °C) ■ II 2D Ex tb IIIC T ⁽¹⁾ °C Db ■ IP 66/67 Without display (All transmitter versions except 2-wire TPS)  ■ II 2G Ex db [ib] IIC T6...T1 Gb (-40 °C to +65 °C) ■ II 2D Ex tb IIIC T ⁽¹⁾ °C Db ■ IP 66/67
CSA	
Intrinsically safe	With display (Analog, TPS, Discrete versions only) or without display (all transmitter versions) ■ Class I, Division 1, Groups A, B, C & D ■ Class I, Division 2, Groups A, B, C & D ■ Class II, Division 1, Groups E, F, & G
Explosion proof	With display (Analog, TPS, Discrete versions and stainless steel transmitter housing material only) or without display (all transmitter versions except 2-wire TPS) ■ Class I, Division 1, Groups C & D ■ Class I, Division 2, Groups A, B, C & D ■ Class II, Division 1, Groups E, F & G
IECEx	
Zone 1 Intrinsically safe	With display (Analog, TPS, Discrete versions only) ■ Ex ib IIC T4...T1 Gb (-40 °C to +65 °C) ■ Ex ib IIIC T ⁽¹⁾ °C Db ■ IP66/IP67 Without display (All transmitter versions) ■ Ex ib IIC T6...T1 Gb (-40 °C to +65 °C ⁽²⁾) ■ Ex ib IIIC T ⁽¹⁾ °C Db ■ IP66/IP67
Zone 1 Flameproof	Without display (All transmitter versions except 2-wire TPS) ■ Ex db [ib] IIC T6...T1 Gb (-40 °C to +65 °C) ■ Ex tb IIIC T ⁽¹⁾ °C Db ■ IP66/IP67 With display (Analog, TPS, Discrete versions and stainless steel transmitter housing material only) ■ Ex db [ib] IIC T6...T1 Gb (-40 °C to +65 °C) ■ Ex tb IIIC T ⁽¹⁾ °C Db ■ IP66/IP67

(1) See the ATEX or IECEx instructions shipped with the product for the maximum surface temperature (T) for dust.

(2) Maximum ambient temperature of 2-wire TPS transmitter version is 167 °F (75 °C).

Environmental specifications

Specification	Value
Ambient temperature limits	-40 °F to +149 °F (-40 °C to +65 °C)
Humidity limits	5 to 95% relative humidity, non-condensing at 140 °F (60 °C)
Vibration limits	Meets IEC 68.2.6, endurance sweep, 5 to 2000 Hz, 50 sweep cycles at 1.0 g
Ingress protection rating	IP66/67, NEMA4 aluminum housing; NEMA4X stainless steel housing

Power requirements

Following are the DC power requirements to operate the meter:

Meter type	Description
Explosion-proof/flameproof meters	<ul style="list-style-type: none"> ■ 24 VDC, 0.65 W typical, 1.1 W maximum ■ Minimum recommended voltage: 21.6 VDC with 1000 ft of 24 AWG (300 m of 0.20 mm²) power-supply cable ■ At startup, power source must provide a minimum of 0.5 A of short-term current at a minimum of 19.6 V at the power input terminals
Intrinsically safe meters	<ul style="list-style-type: none"> ■ 24 VDC, 0.7 W typical with 250 Ω barrier, 0.96 W maximum with 250 Ω barrier⁽¹⁾ ■ Minimum recommended voltage: 22.8 VDC with 1000 ft of 22 AWG (300 m of 0.25 mm²) power-supply cable

(1) For power requirements specific to the 2-wire TPS transmitter version, refer to the 2-Wire TPS CDM Installation Supplement.

Physical specifications

Materials of construction

Wetted parts	
Process connections	316L stainless steel
Measurement tubes	<ul style="list-style-type: none"> ■ Nickel alloy C-22 (or UNS 06022) — CDM100P option ■ 316L stainless steel — CDM100M option
Non-wetted parts	
Sensor housing	316L stainless steel
Transmitter housing	Polyurethane-painted aluminum or 316L stainless steel

Weight

Meter weights assume ANSI CL600 weld-neck, raised-face flanges, and integral transmitter electronics. Meters with other options may have weights that differ slightly from those listed.


Meter type	Weight with aluminum housing	Weight with stainless steel housing
Compact density meter (standard option)	Approximately 28 lbs (13 kg)	Approximately 34 lbs (16 kg)
Compact density meter (7835/7845 retrofit model with spools)	Approximately 31 lbs (14 kg)	Approximately 37 lbs (17 kg)

Dimensions

These dimensional drawings are intended to provide a basic guideline for sizing and planning. Complete and detailed dimensional drawings can be found through the product drawings link in our online store (www.micromotion.com/onlinestore).


Depending on the flange connection, the face-to-face dimension may vary for the CDM standard option.

Compact density meter dimensions – standard option

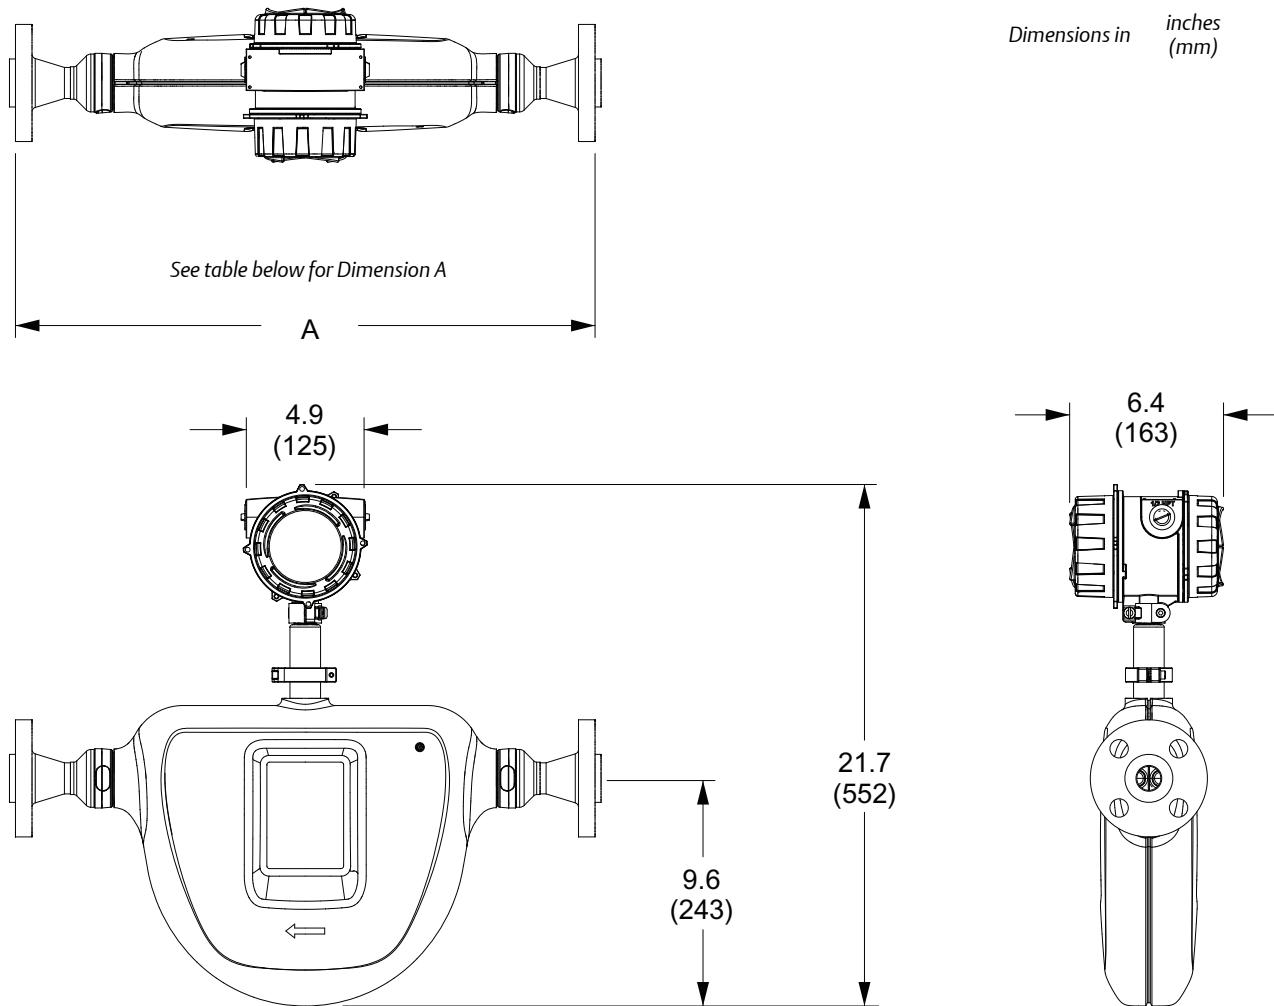

Flange fitting type	Dim. A [± 0.125 in (3 mm)] in inches (mm)
1-inch, CL900, ASME B16.5, F316/316L, Weld neck flange	26.9 (683)
1-inch, CL900, ASME B16.5, F316/316L, Weld neck flange, RTJ face	26.9 (683)
1-inch, CL600, ASME B16.5, F316/316L, Weld neck flange	24.5 (623)
1-inch, CL300, ASME B16.5, F316/316L, Weld neck flange	24.0 (610)
1-inch, CL600, ASME B16.5, F316/316L, Weld neck flange, RTJ face	24.8 (627)
1-inch, CL600, ASME B16.5, F316/316L, Weld neck flange, Raised face 63-125, Raised face finish	24.8 (627)
1-inch, CL150, ASME B16.5, F316/316L, Weld neck flange	23.5 (597)
DN25, PN40, EN 1092-1, F316/316L, Weld neck flange, Type B1	22.5 (573)
DN25, PN40, EN 1092-1, F316/316L, Weld neck flange, Type D	22.5 (573)
DN25, PN100, EN 1092-1, F316/316L, Weld neck flange, Type B2	23.9 (608)

Compact density meter dimensions – 7835/45 retrofit option

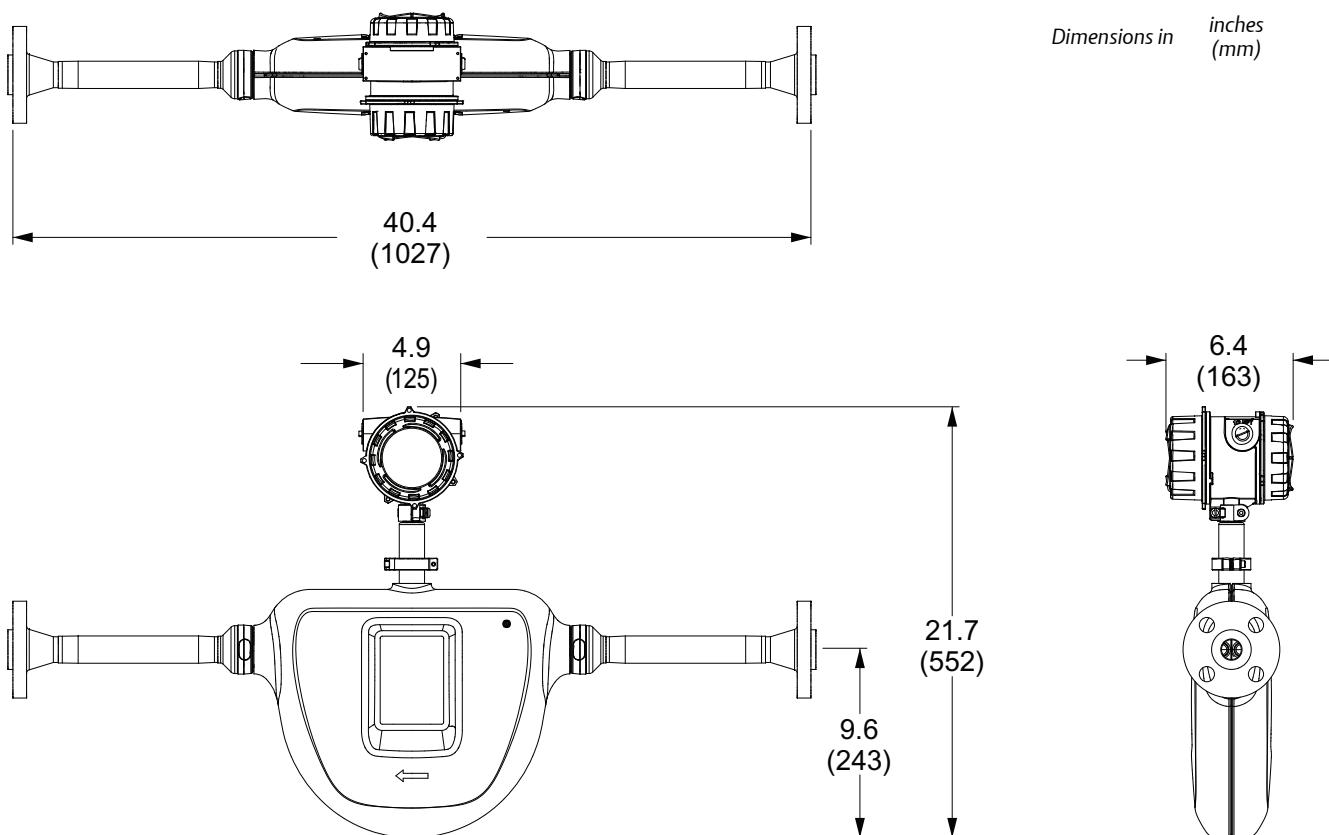

Additional options for installation and configuration

Required barriers and isolators for hazardous area installations

When installing the meter in a hazardous area, safety barriers and galvanic isolators must be installed between the meter and the signal processing equipment. Micro Motion provides the required barriers and isolators for purchase according to the transmitter output type.


Safety barrier/galvanic isolator kits ordering information

The following kits are available for purchase through Micro Motion. For more information on ordering these barriers, contact your local sales representative or Micro Motion Customer Support at flow.support@emerson.com.

Model code	Description	Barrier/Isolator	Output	Notes
BARRIERSETAA	Barrier set, including barriers for all intrinsically safe transmitter versions (CH B: mA, TPS, or DO)	MTL7728P+	mA + HART	
		MTL7728P+	mA / TPS / DO	
		MTL7761AC	RS-485	
		MTL7728P+	Power	
ISOLATORSETBB	Isolator set, including isolators for intrinsically safe Analog version (CH B: mA)	MTL5541	mA + HART	RS-485 barrier is not isolated
		MTL5541	mA	
		MTL7761AC	RS-485	
		MTL5523	Power	
ISOLATORSETCC	Isolator set, including isolators for intrinsically safe Time Period Signal (TPS)/Discrete versions (CH B: TPS or DO)	MTL5541	mA + HART	RS-485 barrier is not isolated
		MTL5532	TPS/DO	
		MTL7761AC	RS-485	
		MTL5523	Power	
BARRIER7787	Barrier for 2-wire CDM, TPS/Power output	MTL7787+	TPS/Power	Quantity (1)
BARRIER7764	Barrier set for 2-wire CDM, 4-wire RTD output	MTL7764+	RTD	Quantity (2)

ProLink® III software: a configuration and service tool

ProLink® III software is an easy-to-use interface that allows you to view key process variables and diagnostics data for your meter. For more information on ordering the software, contact your local sales representative or Micro Motion Customer Support at flow.support@emerson.com.

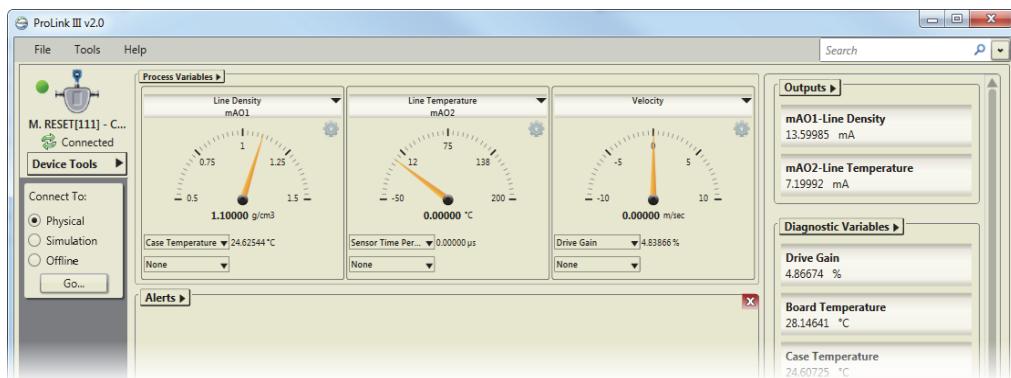

Ordering information

Peak performance precision density meter (CDM100P)

Model	Description
CDM100P	Micro Motion Compact Density Meter, 1-inch (25mm) nickel alloy manifold and measurement tubes with stainless steel fittings

Code	Process connection
A18	1-inch, CL900/1500, ASME B16.5, F316/316L, Weld neck flange
A25	1-inch, CL900/1500, ASME B16.5, F316/316L, Weld neck flange, RTJ Face
330	1-inch, CL600, ASME B16.5, F316/316L, Weld neck flange
329	1-inch, CL300, ASME B16.5, F316/316L, Weld neck flange
A24	1-inch, CL600, ASME B16.5, F316/316L, Weld neck flange, RTJ Face
A21	1-inch, CL600, ASME B16.5, F316/316L, Weld neck flange, Raised face 63-125, Raised face finish
179	DN25, PN40, EN 1092-1, F316/316L, Weld neck flange, Type B1
311	DN25, PN40, EN 1092-1, F316/316L, Weld neck flange, Type D
180	DN25, PN100, EN 1092-1, F316/316L, Weld neck flange, Type B2
999 ⁽¹⁾	ETO process connection

(1) Requires factory option X.

Code	Case option
M	316L stainless steel case
K	316L stainless steel case with purge fittings (one 1/2-inch NPT female)
C ⁽¹⁾	7835/45 retrofit model with standard 316L stainless steel sensor case
D ⁽¹⁾	7835/45 retrofit model with purge fittings (1/2-inch NPT) 316L stainless steel sensor case

(1) Available only with process connection codes 329, 330, and A18.

Code	Transmitter output option
A ^{(1) (2)}	Integral processor for remote mount Model 2700 FOUNDATION™ fieldbus transmitter (Channels A and B inactive)
B	Integral transmitter, Channel B = Time Period Signal, Channel A = mA + HART, Channel C = RS485 Modbus
C	Integral transmitter, Channel B = mA output, Channel A = mA + HART, Channel C = RS485 Modbus
D	Integral transmitter, Channel B = Discrete output, Channel A = mA + HART, Channel C = RS485 Modbus
F	Integral electronics, 2-wire time period signal output, superimposed on power (no internal calculations)

(1) Requires remote-mount Model 2700 transmitter with mounting option H, 4-wire connection option (power and communications).

(2) With transmitter output options code A, all signal outputs on the integrally mounted transmitter are disabled, except for the Modbus/RS-485 communications which is used for communication to the Model 2700 transmitter.

Code	Display option
A	No display
B ⁽¹⁾	Two-line display (non-backlit)

(1) For transmitter housing option code Z, available with only approvals codes M, Z, B, E and 2.

Code	Approvals
For all transmitter output options	
M	Safe area - no hazardous area approval
Z	ATEX – Intrinsically safe (zone 1)
B	CSA (US and Canada) – Intrinsically safe Class 1 Div. 1 Groups B, C, D
E	IECEx – Intrinsically safe (zone 1)
2	CSA (US and Canada) Class 1 Div. 2
For transmitter output options B, C, and D	
A	CSA (US and Canada) – Explosion-proof Class 1 Div. 1 Groups C, D (US and Canada)
F	ATEX – Zone 1 flameproof
I	IECEx – Zone 1 flameproof

Code	Application configuration ⁽¹⁾
Available with all Transmitter output options	
00	No Application configuration
95	Process temperature (4 mA = 0 °C, 20 mA = 200 °C)
XX ⁽²⁾	ETO analog output configuration (customer data required)
Available with transmitter output options B only	
96	Process temperature (4 mA = -50 °C, 20 mA = 200 °C)
97	Process temperature (4 mA = -50 °C, 20 mA = 150 °C)
98	Process temperature (4 mA = 0 °C, 20 mA = 100 °C)
Available with transmitter output options C and D only	
11	Degrees API (4 mA = 0°, 20 mA = 100°) (Process temperature = 0 °C to 60 °C)
12	Line Density (4 mA = 500 kg/m ³ , 20 mA = 1500 kg/m ³) (Process temperature = -40 °C to +140 °C)
13	Referred Density to API tables (metric) (4 mA = 500 kg/m ³ , 20 mA = 1500 kg/m ³) (Process temperature = -40 °C to +140 °C)
21	% Alcohol (4 mA = 0%, 20 mA = 20%) (Process temperature = 0 °C to 40 °C)
22	% Alcohol (4 mA = 50%, 20 mA = 100%) (Process temperature = 40 °C to 70 °C)
23	% Alcohol (4 mA = 80%, 20 mA = 100%) (Process temperature = 50 °C to 90 °C)
24	Alcohol proof (4 mA = 100, 20 mA = 200) (Process temperature = 50 °C to 70 °C)
25	Alcohol proof (4 mA = 160, 20 mA = 200) (Process temperature = 50 °C to 90 °C)
26	% Methanol concentration (4 mA = 35%, 20mA = 60%) (Process temperature = 0 °C to 40 °C)
27	% Ethylene Glycol concentration (4 mA = 10%, 20 mA = 50%) (Process temperature = -20 °C to 40 °C)
31	Brix (sucrose) (4 mA = 0°, 20 mA = 40°) (Process temperature = 0 °C to 100 °C)
32	Brix (sucrose) (4 mA = 30°, 20 mA = 80°) (Process temperature = 0 °C to 100 °C)
41	Balling (4 mA = 0°, 20 mA = 20°) (Process temperature = 0 °C to 100 °C)
51	% NaOH Concentration (4mA = 0%, 20 mA = 20%) (Process temperature = 0 °C to 50 °C)
52	% H ₂ SO ₄ Concentration (4 mA = 0%, 20 mA = 10%) (Process temperature = 0 °C to 38 °C)
53	% H ₂ SO ₄ Concentration (4 mA = 75%, 20 mA = 94%) (Process temperature = 24 °C to 38 °C)
64	% HFCS - 42 (4 mA = 0%, 20 mA = 50%) (Process temperature = 0 °C to 100 °C)
65	% HFCS - 55 (4 mA = 0%, 20 mA = 50%) (Process temperature = 0 °C to 100 °C)
66	% HFCS - 90 (4 mA = 0%, 20 mA = 50%) (Process temperature = 0° to 100 °C)
71	Plato (4 mA = 0°, 20 mA = 30°) (Process temperature = 0 °C to 100 °C)

(1) When the transmitter output options code is B, C, or D, the chosen application configuration code low and high limits are also programmed as the channel A mA output 4mA and 20mA points.

(2) Requires factory option X.

Code	Language (manual and software)
Transmitter display language English	
E	English installation manual and English configuration manual
I	Italian installation manual and English configuration manual
M	Chinese installation manual and English configuration manual
R	Russian installation manual and English configuration manual
Transmitter display language French	
F	French installation manual and English configuration manual
Transmitter display language German	
G	German installation manual and English configuration manual
Transmitter display language Spanish	
S	Spanish installation manual and English configuration manual

Code	Sensor calibration options
A	Standard $\pm 0.1\text{kg/m}^3$ ($\pm 0.0001\text{g/cc}$) density accuracy
M ⁽¹⁾	MID evaluated component (OIML R117) - Requires installation with an approved power supply

(1) MID (OIML R117) calibration option not available with transmitter output option code A.

Code	Transmitter housing option
Z	Integral, aluminum alloy
B	Integral, stainless steel

Code	Conduit connections
Z	Standard 1/2-inch NPT fittings (no adapters)
B	M20 stainless steel adapters

Code	Factory options
Z	Standard product
X	ETO product

Code	Special tests and certificates, tests, calibrations, and certificates (all are optional)⁽¹⁾
Material Quality Examination Tests and Certificates (select any from this group)	
MC	Material Inspection Certificate 3.1 (Supplier Lot Traceability per EN 10204)
NC	NACE Certificate 2.1 (MR0175 and MR0103)
Pressure testing (select any from this group)	
HT	Hydrostatic Test Certificate 3.1
Radiographic examination (select only one from this group)	
RT	X-Ray Package 3.1 (Process connection only; Radiographic Examination Certificate with digital image; Weld map; Radiographic Inspection NDE Qualification)
Dye penetrant examination (select only one from this group)	
D1	Dye Penetrant Test Package 3.1 (Process connection only; Liquid Dye Penetration NDE Qualification)
D2	Dye Penetrant Test Package 3.1 (Case only; Liquid Dye Penetration NDE Qualification)
Weld examination	
WP	Weld Procedure Package (Weld Map, Weld Procedure Specification, Weld Procedure Qualification Record, Welder Performance Qualification)
Positive material testing (select only one from this group)	
PM	Positive Material Test Certificate 3.1 (without carbon content)
Sensor completion options (select any from this group)	
WG	Witness General
SP	Special Packaging
Instrument tagging	
TG	Instrument Tagging – customer information required (max. 24 characters)

(1) Multiple test or certificate options can be selected.

General purpose precision density meter (CDM100M)

Model	Description
CDM100M	Micro Motion Compact Density Meter, 1-inch (25 mm), 316L stainless steel manifold and measurement tubes

Code	Process connection
330	1-inch, CL600, ASME B16.5, F316/316L, Weld neck flange
329	1-inch, CL300, ASME B16.5, F316/316L, Weld neck flange
A24	1-inch, CL600, ASME B16.5, F316/316L, Weld neck flange, RTJ Face
A21	1-inch, CL600, ASME B16.5, F316/316L, Weld neck flange, Raised face 63-125, Raised face finish
179	DN25, PN40, EN 1092-1, F316/316L, Weld neck flange, Type B1
311	DN25, PN40, EN 1092-1, F316/316L, Weld neck flange, Type D
180	DN25, PN100, EN 1092-1, F316/316L, Weld neck flange, Type B2
328	1-inch, CL150, ASME B16.5, F316/316L, Weld neck flange
999 ⁽¹⁾	ETO process connection

(1) Requires factory option X.

Code	Case options
M	316L stainless steel case
K	316L stainless steel case with purge fittings (one 1/2-inch NPT female)
C ⁽¹⁾	7845 retrofit model with standard 316L stainless steel sensor case
D ⁽¹⁾	7835/45 retrofit model with purge fittings (1/2-inch NPT) 316L stainless steel sensor case

(1) Available only with process connection codes 329 and 330.

Code	Transmitter output option
A ^{(1) (2)}	Integral processor for remote mount Model 2700 FOUNDATION™ fieldbus transmitter (Channels A and B inactive)
B	Integral transmitter, Channel B = Time Period Signal, Channel A = mA + HART, Channel C = RS485 Modbus
C	Integral transmitter, Channel B = mA output, Channel A = mA + HART, Channel C = RS485 Modbus
D	Integral transmitter, Channel B = Discrete output, Channel A = mA + HART, Channel C = RS485 Modbus
F	Integral electronics, 2-wire time period signal output, superimposed on power (no internal calculations)

(1) Requires remote-mount Model 2700 transmitter with mounting option H - 4 wire connection option (power and communications).

(2) With transmitter output options code A, all signal outputs on the integrally mounted transmitter are disabled except for the Modbus/RS-485 communications which is used for communication to the Model 2700 transmitter.

Code	Display option
A	No display
B ⁽¹⁾	Two-line display (non-backlit)

(1) For transmitter housing option code Z, available only with approvals codes M, Z, B, E and 2.

Code	Approvals
Available with all transmitter output options	
M	Safe area - no hazardous area approval
Z	ATEX – Intrinsically safe (zone 1)
B	CSA (US and Canada) – Intrinsically safe Class 1 Div. 1 Groups B, C, and D
E	IECEx – Intrinsically safe (zone 1)
2	CSA (US and Canada) Class 1 Div. 2
Available with transmitter output option codes B, C, and D	
A	CSA (US and Canada) – Explosion-proof Class 1 Div. 1 Groups C and D (US and Canada)
F	ATEX – Zone 1 flameproof
I	IECEx – Zone 1 flameproof

Code	Application configuration ⁽¹⁾
Available with all transmitter output options	
00	No application configuration
95	Process temperature (4 mA = 0 °C, 20 mA = 200 °C)
XX ⁽²⁾	ETO analog output configuration (customer data required)
Available with transmitter output option code B only	
96	Process temperature (4 mA = -50 °C, 20 mA = 200 °C)
97	Process temperature (4 mA = -50 °C, 20 mA = 150 °C)
98	Process temperature (4 mA = 0 °C, 20 mA = 100 °C)
Available with transmitter output option codes C and D only	
11	Degrees API (4 mA = 0°, 20 mA = 100°) (Process temperature = 0 °C to 60 °C)
12	Line Density (4 mA = 500kg/m ³ , 20 mA = 1500 kg/m ³) (Process temperature = -40 °C to +140 °C)
13	Referred Density to API tables (metric) (4 mA = 500 kg/m ³ , 20mA = 1500 kg/m ³) (Process temperature = -40 °C to +140 °C)
21	% Alcohol (4 mA = 0%, 20 mA = 20%) (Process temperature = 0 °C to 40 °C)
22	% Alcohol (4 mA = 50%, 20 mA = 100%) (Process temperature = 40 °C to 70 °C)
23	% Alcohol (4 mA = 80%, 20 mA = 100%) (Process temperature = 50 °C to 90 °C)
24	Alcohol proof (4 mA = 100, 20 mA = 200) (Process temperature = 50 °C to 70 °C)
25	Alcohol proof (4 mA = 160, 20 mA = 200) (Process temperature = 50 °C to 90 °C)
26	% Methanol concentration (4 mA = 35%, 20 mA = 60%) (Process temperature = 0 °C to 40 °C)
27	% Ethylene Glycol concentration (4 mA = 10%, 20 mA = 50%) (Process temperature = -20 °C to 40 °C)
31	Brix (sucrose) (4 mA = 0°, 20 mA = 40°) (Process temperature = 0 °C to 100 °C)
32	Brix (sucrose) (4 mA = 30°, 20 mA = 80°) (Process temperature = 0 °C to 100 °C)
41	Balling (4 mA = 0°, 20 mA = 20°) (Process temperature = 0 °C to 100 °C)
51	% NaOH Concentration (4 mA = 0%, 20 mA = 20%) (Process temperature = 0 °C to 50 °C)
52	% H ₂ SO ₄ Concentration (4 mA = 0%, 20 mA = 10%) (Process temperature = 0 °C to 38 °C)
53	% H ₂ SO ₄ Concentration (4 mA = 75%, 20 mA = 94%) (Process temperature = 24 °C to 38 °C)
54	% HNO ₃ Concentration (4 mA = 0%, 20 mA = 40%) (Process temperature = 10 °C to 50 °C)
55	% KOH Concentration (4 mA = 0%, 20 mA = 40%) (Process temperature = 0 °C to 90 °C)
64	% HFCS - 42 (4 mA = 0%, 20 mA = 50%) (Process temperature = 0 °C to 100 °C)
65	% HFCS - 55 (4 mA = 0%, 20 mA = 50%) (Process temperature = 0 °C to 100 °C)
66	% HFCS - 90 (4 mA = 0%, 20 mA = 50%) (Process temperature = 0 °C to 100 °C)
71	Plato (4 mA = 0°, 20 mA = 30°) (Process temperature = 0 °C to 100 °C)

(1) When the transmitter output options code is B, C or D, the chosen application configuration code low and high limits are also programmed as the channel A mA output 4mA and 20mA points.

(2) Requires factory option X.

Code	Language (manual and software)
Transmitter display language English	
E	English installation manual and English configuration manual
I	Italian installation manual and English configuration manual
M	Chinese installation manual and English configuration manual
R	Russian installation manual and English configuration manual
Transmitter display language French	
F	French installation manual and English configuration manual
Transmitter display language German	
G	German installation manual and English configuration manual
Transmitter display language Spanish	
S	Spanish installation manual and English configuration manual

Code	Sensor calibration options
A	Standard $\pm 0.2 \text{ kg/m}^3$ ($\pm 0.0002\text{g/cc}$) density accuracy
M ⁽¹⁾	MID evaluated component (OIML R117) - Requires installation with an approved power supply

(1) MID (OIML R117) calibration option is not available with transmitter output options code A.

Code	Transmitter housing option
Z	Integral, aluminum alloy
B	Integral, stainless steel

Code	Conduit connections
Z	Standard 1/2-inch NPT fittings (no adapters)
B	M20 stainless steel adapters included

Code	Factory options
Z	Standard product
X	ETO product

Code	Special tests and certificates, tests, calibrations, and services (all optional)⁽¹⁾
Material quality examination tests and certificates (select any from this group)	
MC	Material Inspection Certificate 3.1 (Supplier Lot Traceability per EN 10204)
NC	NACE Certificate 2.1 (MR0175 and MR0103)
Pressure testing (select any from this group)	
HT	Hydrostatic Test Certificate 3.1
Radiographic examination (select only one from this group)	
RT	X-Ray Package 3.1 (Process connection only; Radiographic Examination Certificate with digital image; Weld map; Radiographic Inspection NDE Qualification)
Dye penetrant examination (select only one from this group)	
D1	Dye Penetrant Test Package 3.1 (Process connection only; Liquid Dye Penetration NDE Qualification)
D2	Dye Penetrant Test Package 3.1 (Case only; Liquid Dye Penetration NDE Qualification)
Weld examination	
WP	Weld Procedure Package (Weld Map, Weld Procedure Specification, Weld Procedure Qualification Record, Welder Performance Qualification)
Positive material testing (select only one from this group)	
PM	Positive Material Test Certificate 3.1 (without carbon content)
PC	Positive Material Test Certificate 3.1 (including carbon content)
Sensor completion options (select any from this group)	
WG	Witness General
SP	Special Packaging
Instrument tagging	
TG	Instrument Tagging – customer information required (max. 24 characters)

(1) Multiple add-ons may be selected.

**Emerson Process Management
Americas**

7070 Winchester Circle
Boulder, Colorado USA 80301
www.MicroMotion.com
www.Rosemount.com
T: +1 800 522 6277
T: +1 (303) 527 5200
F: +1 (303) 530 8459

Mexico T: 52 55 5809 5300
Argentina T: 54 11 4837 7000
Brazil T: 55 15 3413 8000
Venezuela T: 58 26 1300 8100
Chile T: 56 2 2928 4800

**Emerson Process Management
Europe/Middle East**

Central & Eastern Europe T: +41 41 7686 111
Dubai T: +971 4 811 8100
Abu Dhabi T: +971 2 697 2000
France T: 0800 917 901
Germany T: 0800 182 5347
Italy T: 8008 77334
The Netherlands T: +31 (0) 70 413 6666
Belgium T: +32 2 716 77 11
Spain T: +34 913 586 000
U.K. T: 0870 240 1978
Russia/CIS T: +7 495 981 9811

**Emerson Process Management
Asia Pacific**

Australia T: (61) 3 9721 0200
China T: (86) 21 2892 9000
India T: (91) 22 6662 0566
Japan T: (81) 3 5769 6803
South Korea T: (82) 2 3438 4600
Singapore T: (65) 6 777 8211

© 2016 Micro Motion, Inc. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Micro Motion, ELITE, ProLink, MVD and MVD Direct Connect marks are marks of one of the Emerson Process Management family of companies. All other marks are property of their respective owners.

Micro Motion supplies this publication for informational purposes only. While every effort has been made to ensure accuracy, this publication is not intended to make performance claims or process recommendations. Micro Motion does not warrant, guarantee, or assume any legal liability for the accuracy, completeness, timeliness, reliability, or usefulness of any information, product, or process described herein. We reserve the right to modify or improve the designs or specifications of our products at any time without notice. For actual product information and recommendations, please contact your local Micro Motion representative.