

DATA / SPECIFICATION SHEET

NOVUS 34

DESCRIPTION

Novus 34 is a superior performance universal compressed sheet material based on a blend of aramid/inorganic fibres and special additives, with a high quality nitrile rubber binder system.

SERVICE


A superior performance material with excellent mechanical properties, it is suitable for many applications including oils, solvents, high pressure steam and gases including oxygen.

APPROVALS / COMPLIANCE

DIN-DVGW (Gas Industry) NG-5123 AR0822
 WRAS Potable Water
 BAM (Oxygen service) up to 90°C and 160 bar
 Independently tested to Shell specification MF 94-0960
 Complies with BS Specification 7531 Grade X
 TA-LUFT (in accordance with VDI Guideline 2440)

AVAILABILITY


Thickness range = 0.25mm to 6.0mm
 Standard sheet sizes = 2.0m x 2.0m, 2.0m x 1.5m,
 2.0m x 1.0m, 1.5m x 1.5m, 1.5m x 1.0m.
 Standard roll sizes = up to a maximum size of 6.0m X 2.0m
 Available with fine mesh mild steel reinforcement: Novus 34
 Metallic or gauze mild steel wire reinforcement: Novus 34 GWI
 Can also be supplied with anti-stick and graphite coating.

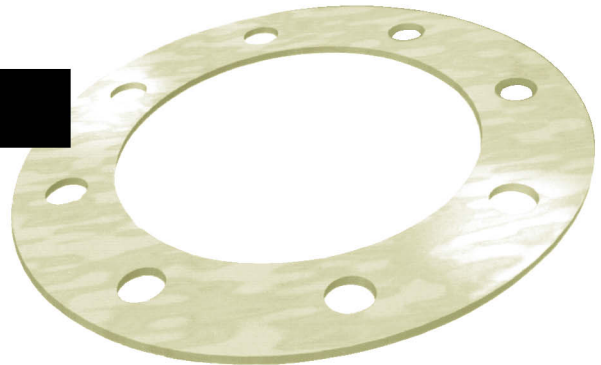

Colour - White

TYPICAL PHYSICAL PROPERTIES

| | | |
|------------------|--------------------|------------|
| Thickness | | 1.5mm |
| Density | | 1.75g/cc |
| Tensile Strength | ASTM F152 | 15MPa |
| Compression | ASTM F36 | 9% |
| Recovery | ASTM F36 | 55%min |
| Residual Stress | BS7531 (300°C) | 26MPa |
| | DIN 52913 | 32 MPa |
| Gas Leakage | BS 7531 | <1.0cc/min |
| ASTM Oil 1 | Thickness Increase | 1.0% |
| IRM 903 Oil | Thickness Increase | 2.5% |
| ASTM Fuel B | Thickness Increase | 3.0% |

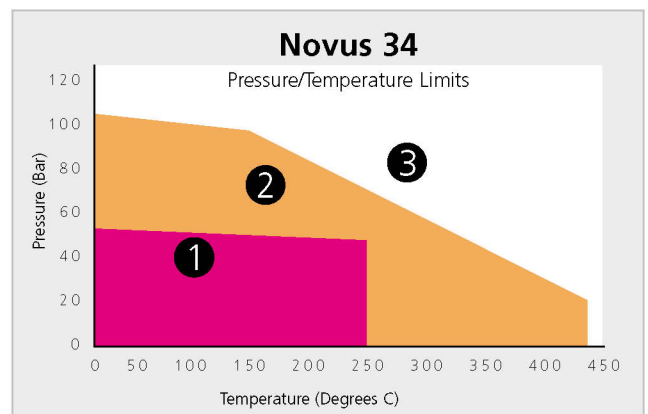

- ① Suitable subject to chemical compatibility
- ② Suitable in some cases but check your application requirements with Novus
- ③ Contact the Novus Technical Team for applications with higher temperatures and pressures. Applicable to 1.5mm and below.

The operating temperature of non-asbestos sheet material is related to the thickness of materials selected. Thinner materials give better temperature and pressure properties.

As the company's products are used for a multiplicity of purposes and as the company has no control over the method of their applications or use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the company and the customer is given for customers assistance only and without liability on the part of the company.