





Features

- · Constant Voltage + Constant Current mode output
- Metal housing with class I design
- Built-in active PFC function
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
 3 in 1 dimming
- Typical lifetime > 62000 hours
- 7 years warranty


Applications

- · LED street lighting
- LED high-bay lighting
- · Parking space lighting
- · LED fishing lamp
- · LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

Description

HLG-320H series is a 320W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-320H operates from 90 ~ 305VAC and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 94%, with the fanless design, the entire series is able to operate for -40°C ~ +90°C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-320H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding

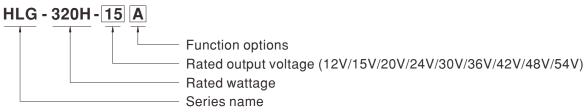

Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
С		Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.	By request
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request


320W Constant Voltage + Constant Current LED Driver

SPECIFICATION

MODEL		HLG-320H-12	HLG-320H-15	HLG-320H-20	HLG-320H-24	HLG-320H-30	HLG-320H-36	HLG-320H-42	HLG-320H-48	HLG-320H-54	
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V	
	CONSTANT CURRENT REGION Note.4		7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V	
OUTPUT	RATED CURRENT	22A	19A	15A	13.34A	10.7A	8.9A	7.65A	6.7A	5.95A	
	RATED POWER	264W	285W	300W	320.16W	321W	320.4W	321.3W	321.6W	321.3W	
	RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p	
	VOLTAGE ADJ. RANGE		, ,,		potentiometer	,					
		10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	21 ~ 26V	26 ~ 32V	32 ~ 39V	38 ~ 45V	43 ~ 52V	49 ~ 58V	
0011 01	CURRENT ADJ. RANGE	Adjustable fo	r A/C-Type on	ly (via built-in	potentiometer)					
	CORRENT ADJ. RANGE	11 ~ 22A	9.5 ~ 19A	7.5 ~ 15A	6.67 ~ 13.34A	5.35 ~ 10.7A	4.45 ~ 8.9A	3.8 ~ 7.65A	3.35 ~ 6.7A	2.97 ~ 5.95	
	VOLTAGE TOLERANCE Note.3	±3.0%	±2.0%	±1.5%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
						- 0.070	- 0.070		- 0.070		
		2500ms,80ms/115VAC 500ms,80ms/230VAC									
	HOLD UP TIME (Typ.)	15ms / 115VAC, 230VAC									
	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC									
	TOZINIOZ IUNIOZ NOICIO	(Please refer to "STATIC CHARACTERISTIC" section)									
	FREQUENCY RANGE	47 ~ 63Hz									
		PF≥0.98/115VAC, PF≥0.95/230VAC, PF≥0.94/277VAC @, full load									
	POWER FACTOR (Typ.)	(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)									
		THD< 20% (@ load≥50% / 115VAC,230VAC; @ load≥75% / 277VAC)									
	TOTAL HARMONIC DISTORTION	,	_		STORTION (TH		,				
INPUT	EFFICIENCY (Terr.) (020)/)	,					04.50/	050/	050/	050/	
	EFFICIENCY (Typ.) (230Vac)	91%	92.5%	93.5%	94%	94%	94.5%	95%	95%	95%	
	EFFICIENCY (Typ.) (277Vac)	91.5%	93%	94%	94.5%	94.5%	95%	95%	95%	95%	
	AC CURRENT (Typ.)	3.5A / 115VA	C 1.65A/	230VAC	1.45A / 277VA	2					
	INRUSH CURRENT(Typ.)	COLD START 70A(twidth=1010µs measured at 50% lpeak) at 230VAC; Per NEMA 410									
	MAX. No. of PSUs on 16A	4 4/1 41 1 (1 8)/0 4 /1 41 1 (2 20)									
	CIRCUIT BREAKER	1 unit (circuit breaker of type B) / 2 units (circuit breaker of type C) at 230VAC									
	LEAKAGE CURRENT	<0.75mA/277VAC									
PROTECTION :	OVER CURRENT Note.4 95 ~ 108% Constant current limiting, recovers automatically after fault condition is removed										
					-		emovea				
	SHORT CIRCUIT				fault condition		I		I		
	OVER VOLTAGE	14 ~ 17V		22.5 ~ 27V	27 ~ 33V	33 ~ 37V	40 ~ 46V	46.5 ~ 53V	53.5 ~ 60V	59 ~ 65V	
	0121(1021)(02	Shut down and latch off o/p voltage, re-power on to recover									
	OVER TEMPERATURE	Shut down and latch off o/p voltage, re-power on to recover									
	WORKING TEMP.	Tcase= -40 ~	+90°C (Pleas	e refer to "OU"	TPUT LOAD vs	s TEMPERATU	JRE" section)				
	MAX. CASE TEMP.	Tcase=+90°C									
	WORKING HUMIDITY	20 ~ 95% RH	non-condensi	na							
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C,		3							
	TEMP. COEFFICIENT										
		±0.03%/°C	,								
	VIBRATION				72min. each al						
	SAFETY STANDARDS Note.8	UL8750(type"HL"), CSA C22.2 No. 250.0-08; TUV EN61347-1, EN61347-2-13 independent; IP65 or IP67 (except for HLG-320H C-type)									
	CALLETT GIAMBANADO NOCOS	J61347-1, J61347-2-13 (except for HLG-320H C-type) approved									
CAEFTYO	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC									
SAFETY &	ISOLATION RESISTANCE	I/P-O/P. I/P-F	G, O/P-FG:10	00M Ohms / 50	00VDC/25°C/	70% RH					
EMC		-	-		R22) Class B, E		Class C (@ lnad	1≥50%) · FN6	1000-3-3		
	EMC IMMUNITY				EN61547, EN5					l ing_l ing 2K\	
	MTBF					3024, light ma	ustry level (sur	ge illillidility Li	iie-Laitii +itv,	LING-LING ZIV	
		157.1K hrs m		3K-217F (25°C)						
OTHERS	DIMENSION	252*90*43.8r	,								
	PACKING		16Kg/0.92CUF								
NOTE	All parameters NOT special										
	Ripple & noise are measure		-	-	-	e terminated w	ith a 0.1uf & 4	7uf parallel ca	pacitor.		
	3. Tolerance: includes set up tolerance, line regulation and load regulation.										
	4. Please refer to "DRIVING N				TATIC 2:::-	OTES:-					
	5. De-rating may be needed u		_								
	6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.										
	7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the										
	complete installation, the fin				-			-		. 7	
	8. The model certified for CCC									alls.	
	9. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED driver can only be used behind a switch without permanently										
	connected to the mains. 10. This series meets the typical life expectancy of >62,000 hours of operation when Tcase, particularly (tc) point (or TMP, per DLC), is about 75°C or less.										
	1		-	•			riy (tc) point (o	r IMP, per DL	C), is about 75	o C or less.	
	11. Please refer to the warrant	ty statement o	n MEAN WEL	L's website at	http://www.me	anwell.com					
									lama.HI G-320H-		


■ BLOCK DIAGRAM

Fosc: 65KHz

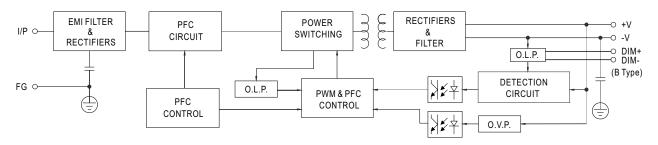

■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

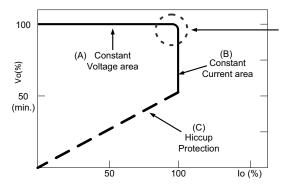


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION

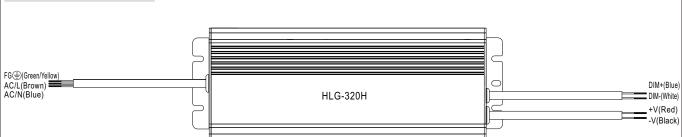


※ 3 in 1 dimming function (for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 1 ~ 10VDC

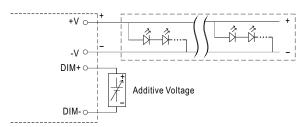


"DO NOT connect "DIM- to -V"

 \bigcirc Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

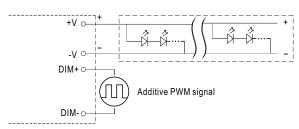



"DO NOT connect "DIM- to -V"


Applying additive resistance:

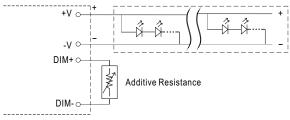

"DO NOT connect "DIM- to -V"










Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

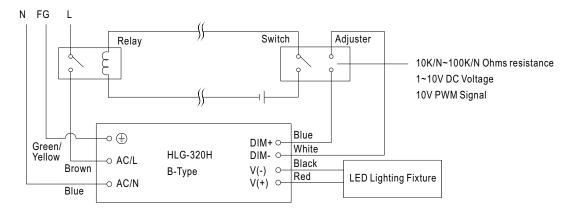

Using a switch and relay can turn ON/OFF the lighting fixture.



50%

60%


70%

LOAD

80%

90%

100%

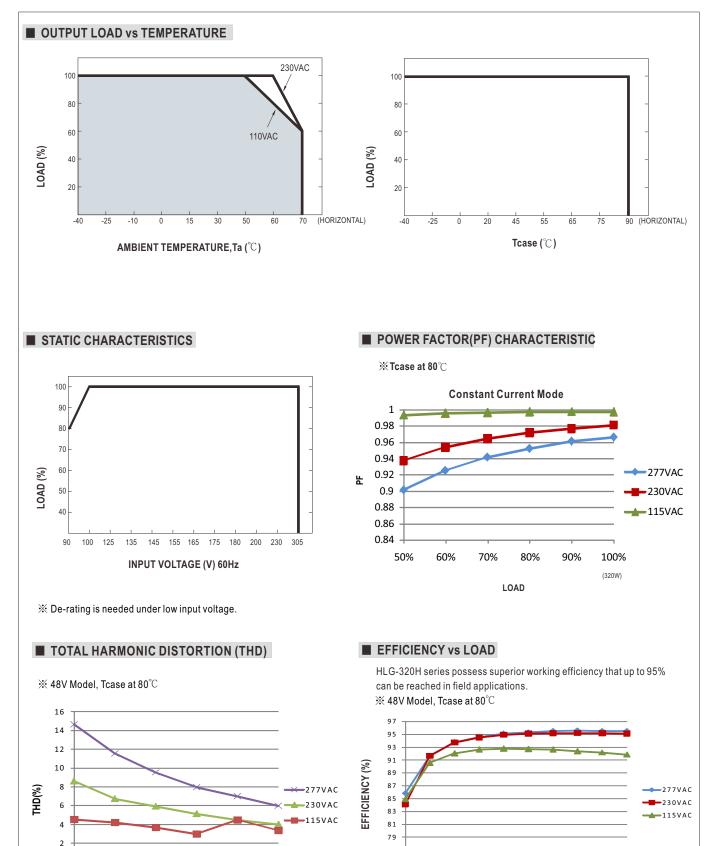

75

30%

50%


60% 70%

LOAD


80%




■ LIFETIME

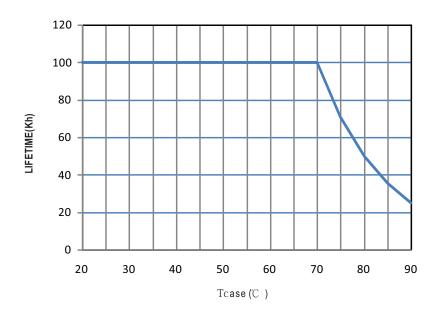



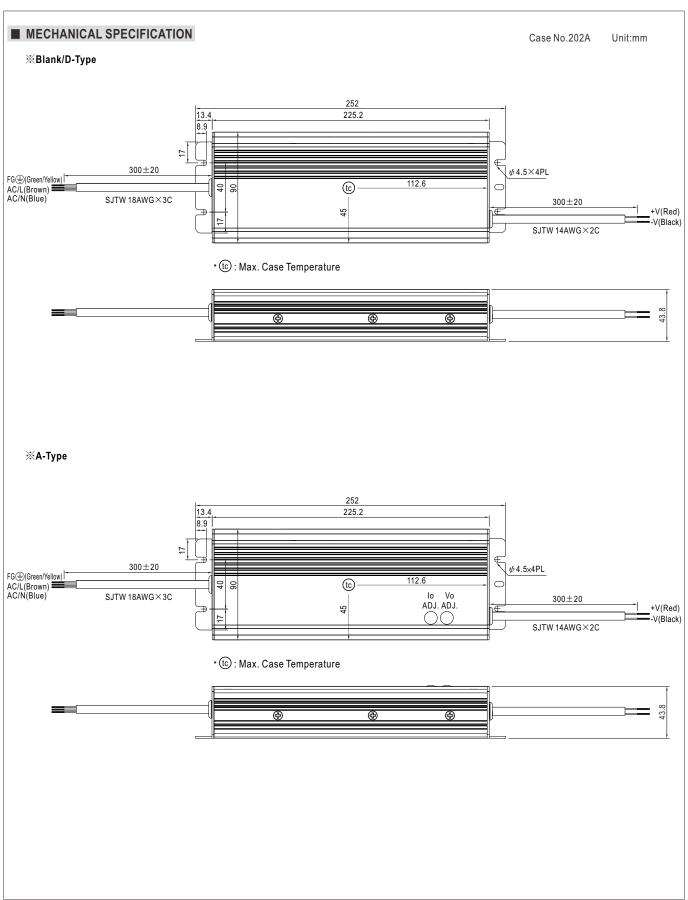



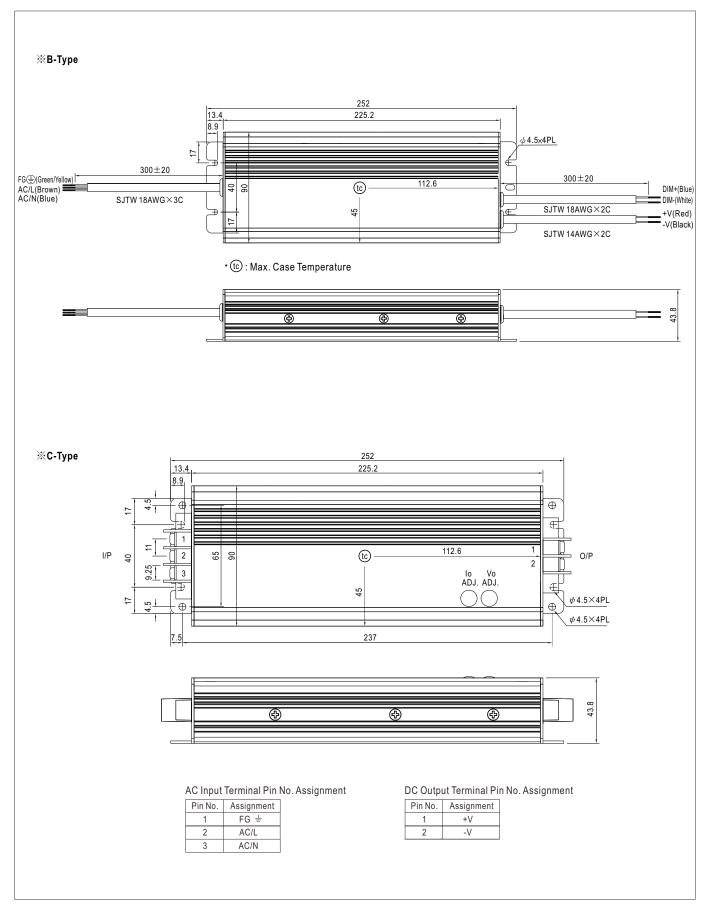





■ WATERPROOF CONNECTION

X Waterproof connector

 $Water proof connector \ can be \ assembled \ on \ the \ output \ cable \ of \ HLG-320H \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$

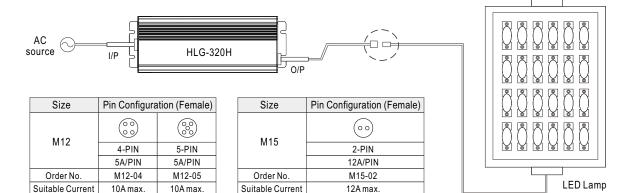

X Cable Joiner

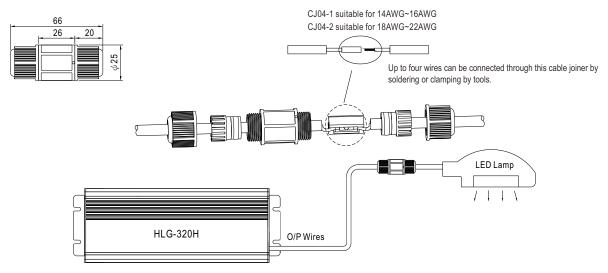

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

※ Junction Box Option

