




**SERIES TAIS-MIGNON**  
**CMP\_INT**  
**CODE 202271**

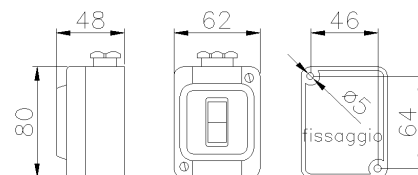

### Datasheet

#### Electrical characteristics

Rated current	16/10A
Supply Voltage	250V~/400V~ 50/60Hz
Poles	1P
Rated insulation voltage	-
Insulation Class	II
CAM layout	-
Function Apparatus Control	One way switches
Protection	-

#### Mechanical characteristics

Manufacturing material	Resin Thermosetting Palazzoli
Treatment type	-
Surface finishing	-
Color	Blue RAL 5015 (Cover), Grey RAL 7035 (Base)
Execution	Wall mounting
Dimensions	90X62X48 mm
Depth	-
Front-plate dimension	-
Hole type	M20
Protection degree	IP67
Additional degree protection	-
Shock resistance	IK04 according to IEC/EN 62262
Resistance to Glow wire	960°C
Flame rating according UL94	V-0
Corrosivity category	-
Net Weight	198 G
Working Environment Temp.	Min: -25°C ;Max: +70°C
Warehousing Temperature	Min: -50°C ;Max: +80°C

#### Technical data switch

Thermal current	16 A
Rated short-circuit current	-
Terminals type	-
Conductors section	Min: - ;Max: -
Terminal tightening torque	-
Auxiliary status contacts	-
Padlockable handle	-
Operating category	-

#### Reference Standards and Directives

ETIM classification	EC001590
Certification and approval marks	CE, UKCA, RINA_ELE20321CS, NYCE COLOMBIA, IMQ
Directives	2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/35/EU (LVD)
Reference Standards	EN 60669-1:1999, EN 63000:2018, EN 60669 1:1999/A2:2008, EN 60669-1/IS1:2009, EN 60669-1:1999/A1:2002

The images are purely indicative. Palazzoli reserves the right to make changes without notice.